

CIRCUIT DRAWN WITH  
POWER SUPPLY OFF

FOR TYPICAL REMOTE CONTROL  
DETAILS SEE DOCUMENT  
**No RWS**

TRANSFORMER TAPPING OPTIONS

TYPE 1

TAP	NOM 50/60HZ	50HZ	60HZ
W	220/230	176-242	198-259
X	380/400	304-418	342-446
Y	415/420	332-457	374-487
Z	440/460	352-484	396-517

FUSE FS1 - 250mA ANTI-SURGE

TYPE 2

TAP	NOM 50/60HZ	50HZ	60HZ
W	346/380	285-388	321-419
X	480/500	406-552	432-564
Y	240/240	192-261	216-282
Z	550/575	445-605	501-654

FUSE FS1 - 250mA ANTI-SURGE

TYPE 3

TAP	NOM 50/60HZ	50HZ	60HZ
X	660/660-690	534-726	600-726
Y	690/---	558-759	

FUSE FS1 - 150mA ANTI-SURGE

ALL TRANSFORMER TYPES - PS1 SELF  
RESETTING  
FUSE

NOTE

REFER TO PUBLICATION E170E FOR  
APPROVED FUSES FS1 AND FS2.

FOR TYPICAL REMOTE CONTROL  
INDICATING, MONITORING AND ALARM  
CIRCUITS SEE PUBLICATION E120E

MAX EXTERNAL LOAD ON TERMINALS  
4 & 5 TO BE 5W.

CONTROL SIGNAL THRESHOLD VOLTAGES  
TO BE MINIMUM 'ON' 20V AC/DC  
MAXIMUM 'OFF' = 3V  
MINIMUM CONTROL SIGNAL DURATION  
TO BE 300mS.

CURRENT DRAWN FROM EACH REMOTE  
CONTROL SIGNAL IS 5mA ON 24V DC  
OR 12mA ON 120V AC


WIRES ARE IDENTIFIED AT EACH END  
BY TERMINAL No. OR TAG No.

VOLTAGE INPUT (0-5 VOLTS)  
+Ve TO 'A', 0 VOLTS TO COMMON  
CURRENT INPUT (0-20mA)  
LINK A TO B, CURRENT SOURCE  
BETWEEN A/B AND COMMON.

22 --- ANALOGUE I/P 'A'  
23 --- ANALOGUE I/P 'B'  
24 --- COMMON

26 --- +V (24VDC)  
27 --- CAN-H  
28 --- CAN-L  
29 --- CAN OV  
45 --- SCREEN  
46 ---

INDICATION CONTACTS S1-S4 ARE SHOWN  
IN THEIR DEFAULT CONFIGURATION.  
CONTACTS MAY BE CONFIGURED FOR ANY  
OF THE FUNCTIONS DESCRIBED IN E170E

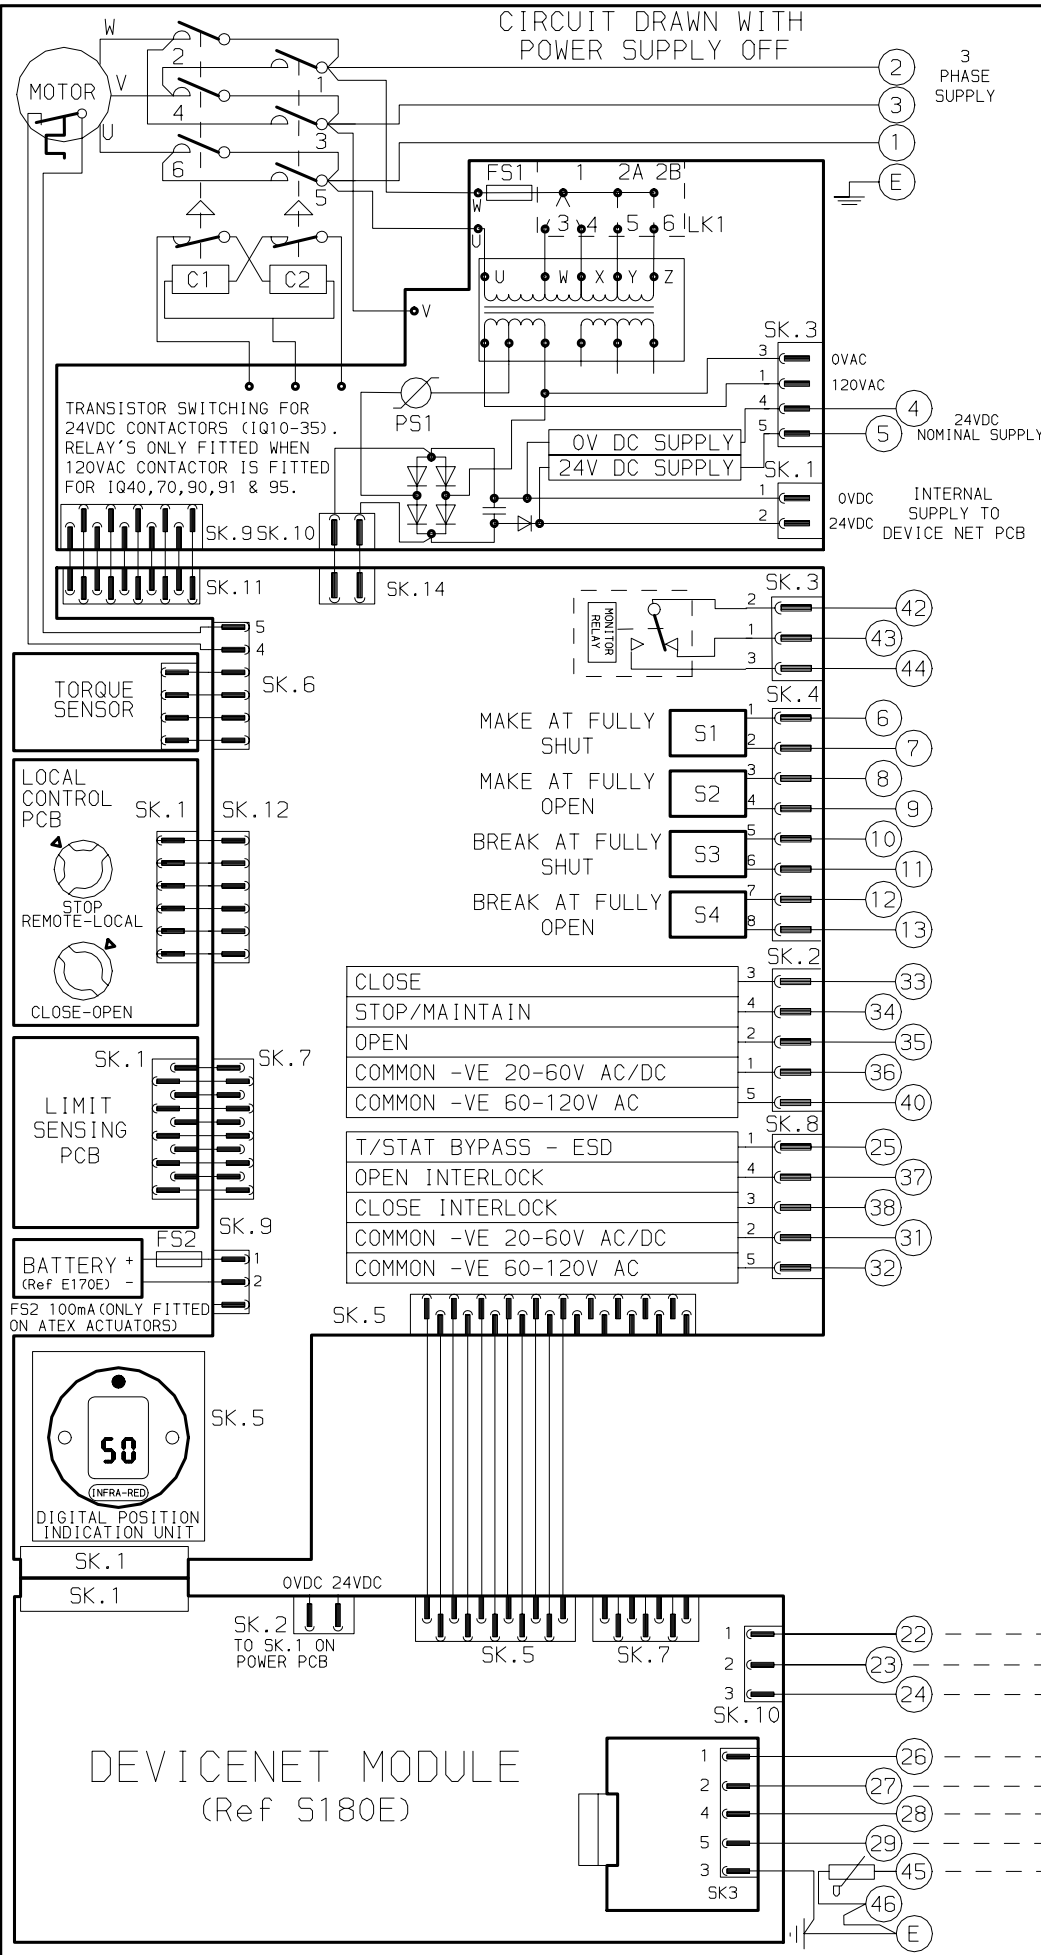

DEVICENET MODULE  
(Ref S180E)

No	DATE	REVISION DETAILS
03	300503	DIAGRAM RE-FORMATTED TO SEPERATE REMOTE CONTROL CIRCUITRY (See 'RWS' Ref)

**www.rotork.com**

ROTORK CONTROLS LTD BATH, BA1 3JQ ENGLAND Tel:01225-733200	ROTORK CONTROLS INC ROCHESTER NY 14624, USA Tel:585-328-1550
---	---

CONFIG BY PRE  
DATE 240904  
CHECKED PJW  
BASE WD --  
JOB No --  
M.I.No .

**IQ + DEVICENET**

CIRCUIT DIAGRAM No -REV 102  
**3000-700-03**

B1 C1 B2 C2